

SRP-350III

3 inch POS printer



Retail



Restaurants & Bars




Ticketing



Kiosk

The Industry's steady seller

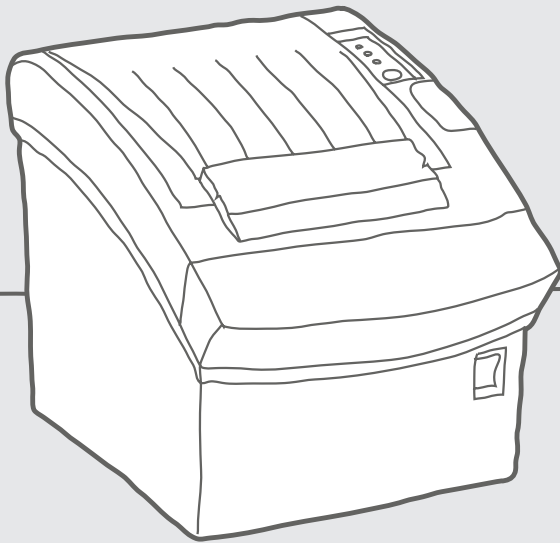


Powerful Printing Performance

- Fast printing up to 250mm/sec (25% faster than the SRP-350II)
- 4-type dithering options for graphic printing
- A family of the world-class SRP-350 line



Multiple interface choice

- Built-in USB with a choice of Serial, Parallel, or Ethernet



User-friendly Design

- Anti-jam guide
- Stand-alone or Space-saving wall-mount use
- 2" or 3" paper choice

SRP-350III

3 inch POS printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-350III: Up to 250 mm/sec
SRP-352III: Up to 230 mm/sec

Print Resolution

SRP-350III: 180 dpi
SRP-352III: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm
Optional 58 mm

Media Roll Diameter

Up to 83 mm

Media Thickness

0.05 ~ 0.08mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x D x H)

145 x 204 x 146 mm
(5.70 x 8.03 x 5.74 inch)

Weight

1.55kg (3.41 lbs.)

Electrical

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

NV Image Memory

256 Kbytes (mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

- ① USB V2.0 FS + Serial
- ② USB V2.0 FS + Parallel
- ③ USB V2.0 FS + Ethernet
- ④ USB V2.0 FS + SD

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Thermal Print Head (TPH)

150 km

Auto Cutter

1.8 Million Cuts

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS / JPOS Driver,
Linux / Mac CUPS Driver,
Virtual COM USB / Ethernet Driver,
Utility Program

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Xamarin SDK, Chrome SDK, Cordova Plugin

Application

mPrint App (iOS)

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-350III: Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21

SRP-352III: Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95
Extended Graphics: 128 x 33 page
International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 39, Code 93, Code 128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E
2D: Data Matrix, PDF417, QR code

Accessories

Optional

Built-in SMPS, Vertical stand, Wall mount,
Splash Proof Cover, External buzzer, B-Melodist,
USB A-B Cable 1.8m, Serial Cable (9-9/25-9pin),
Parallel Cable



BR_SRP-350III_EN_SEP20_V1

Copyright © BIXOLON Co., Ltd. All rights reserved. Features and specifications are subject to change without prior notice.

BIXOLON

BIXOLON Co., Ltd.
+82 (0) 31 218 5500
sales@bixolon.com

BIXOLON America Inc.
+1 858 764 4580
sales@bixolonusa.com

BIXOLON Europe GmbH
+49 211 68 78 54 0
sales@bixolon.de

www.Bixolon.com

PROCOM iPOS Systems GmbH

Rösslerstraße 90 • 64293 Darmstadt • Tel.: +49 6151 1534-100 • info@procom-gmbh.com • www.pos-kassensysteme.de